

# Breakout Box

## RocketPort® EXPRESS

### ICRPB-16RJ45-RM



- RS-232/422/485 software selectable interfaces
- 15 KV surge protection
- Communication speeds up to 460 Kbps
- 1U rack mount housing
- RJ45 connectors


16 RJ45 connectors



## Function

Flexible, reliable and high-speed serial port expansion. The RocketPort EXPRESS family comprises serial adapter cards compatible with systems supporting x1, x2, x4, x8, x12 or x16 PCI Express expansion slots. Cards are designed for standard and low-profile PCs and servers and ship with a low-profile and a standard-height bracket. All models feature software-selectable RS-232/422/485 serial communication at data transmission speeds up to 921 Kbps. Connection to serial devices are made utilizing RJ45, DB9 or DB25 fan-out cables or DB9 or DB25 interface boxes, depending on the selected model.

## Dimensions

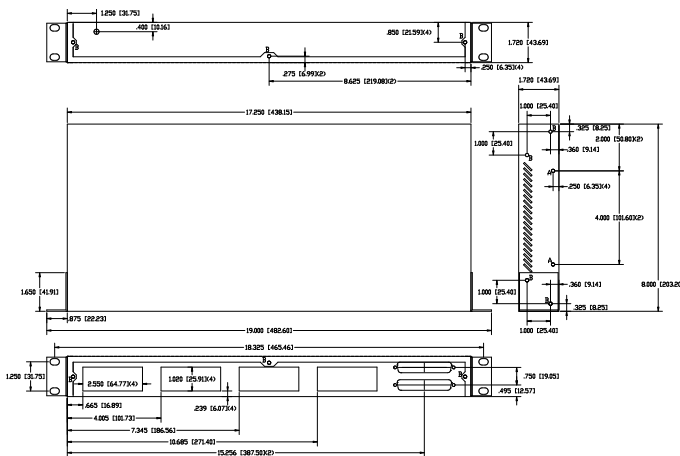

## Technical Data

### General specifications

UL File Number E185802

### Functional safety related parameters

MTBF 65.9 a

### Electrical specifications

Surge protection 15 KV / 200 A for 1 ns

### Interface

Interface type Software selectable interfaces: RS-232 , RS-422 , RS-485

Physical 16 x RJ45

Supported baud rates 300 to 460.8 Kbps

### Directive conformity

Electromagnetic compatibility

Release date: 2024-10-01 Date of issue: 2024-10-01 Filename: 70116473\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

## Technical Data

Directive 2014/30/EU	EN 61000-4-2:2009 EN 61000-4-3:2006+A1:2008+A2:2010 EN 61000-4-4:2012 EN 61000-4-5:2014+A1:2017 EN 61000-4-6:2014 EN 61000-4-11:2004+A1:2017
RoHS	EN IEC 63000:2018
<b>Standard conformity</b>	
Electrical safety	CSA C22.2 No. 60950 / UL60950
Emitted interference	EN 55032:2015 FCC CFR 47, part 15, subpart B: 2017 ICES-003 AS/NZ5 CISPR 32, FCC Part 15 Subpart B Class A
Noise immunity	EN 55035:2017-07
<b>Ambient conditions</b>	
Ambient temperature	0 ... 60 °C (32 ... 140 °F)
Storage temperature	-20 ... 85 °C (-4 ... 185 °F)
Relative humidity	max. 95 % non-condensing
Altitude	0 ... 3048 m
<b>Mechanical specifications</b>	
Mass	2531.6 g
<b>Dimensions</b>	
Height	44.5 mm
Width	425.5 mm
Length	203.2 mm
Construction type	Metal housing
Mounting	panel mount

## Connection Assignment



Pin	Assignment			
	RS-232	RS-422	RS-485 Full Duplex	RS-485 Half Duplex
1	RTS	TxD+	TxD+	TxD/RxD
2	DTR	n.c.	n.c.	n.c.
3	SIG GND	SIG GND	SIG GND	SIG GND
4	TxD	TxD-	TxD-	TxD/RxD
5	RxD	RxD-	RxD-	n.c.
6	DCD	n.c.	n.c.	n.c.
7	DSR	n.c.	n.c.	n.c.
8	CTS	RxD+	RxD+	n.c.

Release date: 2024-10-01 Date of issue: 2024-10-01 Filename: 70116473\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

 **PEPPERL+FUCHS**