

Breakout Box

RocketPort® EXPRESS

ICRPB-32RJ45-RM



- RS-232/422/485 software selectable interfaces
- 15 KV surge protection
- Communication speeds up to 460 Kbps
- 1U rack mount housing


32 RJ45 connectors



Function

Flexible, reliable and high-speed serial port expansion. The RocketPort EXPRESS family comprises serial adapter cards compatible with systems supporting x1, x2, x4, x8, x12 or x16 PCI Express expansion slots. Cards are designed for standard and low-profile PCs and servers and ship with a low-profile and a standard-height bracket. All models feature software-selectable RS-232/422/485 serial communication at data transmission speeds up to 921 Kbps. Connection to serial devices are made utilizing RJ45, DB9 or DB25 fan-out cables or DB9 or DB25 interface boxes, depending on the selected model.

Dimensions

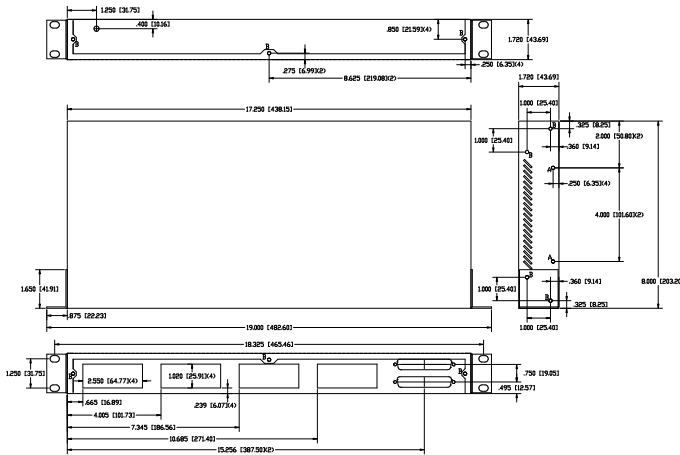

Technical Data

General specifications

UL File Number E185802

Functional safety related parameters

MTBF 65.9 a

Electrical specifications

Surge protection 15 KV / 200 A for 1 ns

Interface

Interface type Software selectable interfaces: RS-232 , RS-422 , RS-485

Physical 32 x RJ45

Supported baud rates 300 to 460.8 Kbps

Directive conformity

Electromagnetic compatibility

Release date: 2024-10-01 Date of issue: 2024-10-01 Filename: 70116474_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data

| | |
|----------------------------------|---|
| Directive 2014/30/EU | EN 61000-4-2:2009 EN 61000-4-3:2006+A1:2008+A2:2010 EN 61000-4-4:2012 EN 61000-4-5:2014+A1:2017 EN 61000-4-6:2014 EN 61000-4-11:2004+A1:2017 |
| RoHS | EN IEC 63000:2018 |
| Standard conformity | |
| Electrical safety | CSA C22.2 No. 60950 / UL60950 |
| Emitted interference | EN 55032:2015 FCC CFR 47, part 15, subpart B: 2017 ICES-003 AS/NZ5 CISPR 32, FCC Part 15 Subpart B Class A |
| Noise immunity | EN 55035:2017-07 |
| Ambient conditions | |
| Ambient temperature | 0 ... 60 °C (32 ... 140 °F) |
| Storage temperature | -20 ... 85 °C (-4 ... 185 °F) |
| Relative humidity | max. 95 % non-condensing |
| Altitude | 0 ... 3048 m |
| Mechanical specifications | |
| Mass | 2531.6 g |
| Dimensions | |
| Height | 44.5 mm |
| Width | 425.5 mm |
| Length | 203.2 mm |
| Construction type | Metal housing |
| Mounting | panel mount |

Connection Assignment



| Pin | Assignment | | | |
|-----|------------|---------|--------------------|--------------------|
| | RS-232 | RS-422 | RS-485 Full Duplex | RS-485 Half Duplex |
| 1 | RTS | TxD+ | TxD+ | TxD/RxD |
| 2 | DTR | n.c. | n.c. | n.c. |
| 3 | SIG GND | SIG GND | SIG GND | SIG GND |
| 4 | TxD | TxD- | TxD- | TxD/RxD |
| 5 | RxD | RxD- | RxD- | n.c. |
| 6 | DCD | n.c. | n.c. | n.c. |
| 7 | DSR | n.c. | n.c. | n.c. |
| 8 | CTS | RxD+ | RxD+ | n.c. |