

DB9 Male to DB9 Female, 6 ft.


Model 9PAMF6

B+B SMARTWORX

Powered by

ADVANTECH


www.advantech-bb.com

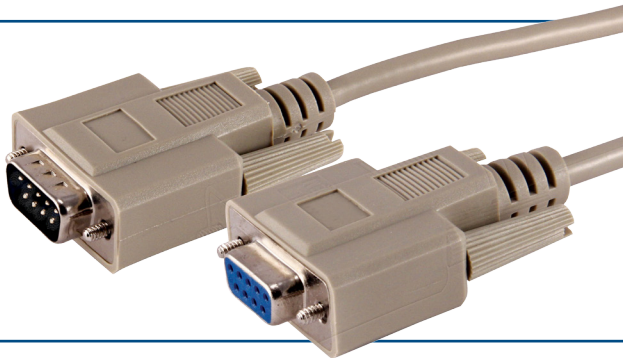

PRODUCT FEATURES

- + Fully molded backshell with strain relief for added protection
- + 28 AWG stranded conductors for flexibility
- + Thumbscrews for tool-less termination

MECHANICAL DIAGRAM

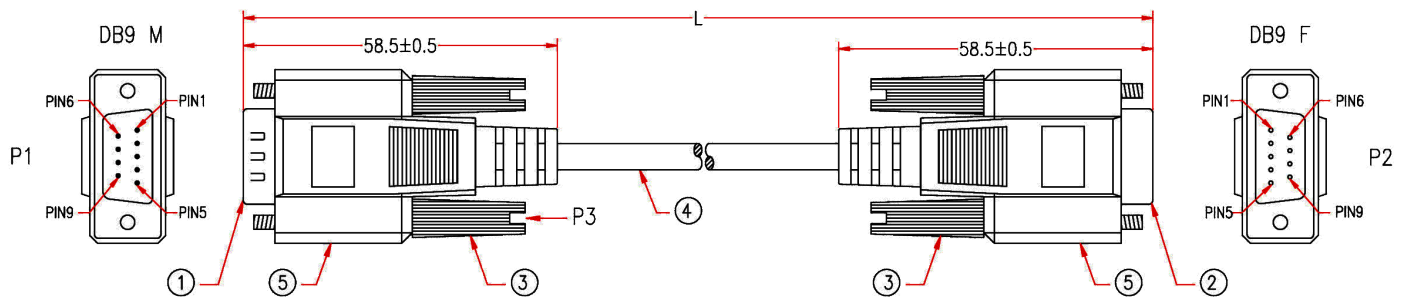

P1	1006	P2	
1	—	1	BROWN
2	—	2	RED
3	—	3	ORANGE
4	—	4	YELLOW
5	—	5	GREEN
6	—	6	BLUE
7	—	7	PURPLE
8	—	8	GREY
9	—	9	BLACK
SHIELD	—	SHIELD	

*NOTE: All relevant materials are complied with RoHS directive

5	BLACK PVC TUBE $\phi 3.0 \times 22\text{mm}$
	ALUMINUM FOIL 33*65mm
	MOLDED PE COLOR TRANSPARENT
	MOLDED PVC BEIGE
4	NON-UL 9C 28AWG, ALUM-NYLAR FOIL SHIELDING WITH DRAIN WIRE, OD 5.0mm, JACKET BEIGE, DRAWING NO. EMAL2809C-051
3	MOLDED THUMBSCREW #4-40, LENGTH 46.5mm, BEIGE
2	DB9 FEMALE, GOLD FLASH ON CONTACTS, BLUE INSULATOR
1	DB9_MALF...GOLD_FLASH_ON_CONTACTS...BLUE_INSULATOR

All product specifications are subject to change without notice.

9PAMF6_4816ds

B+B SMARTWORX

Powered by

ADVANTECH

orders@advantech-bb.com
support@advantech-bb.com

Corporate Headquarters: 707 Dayton Road, PO Box 1040 Ottawa, IL 61350 USA 815-433-5100 Fax 433-5104
European Office: Westlink Commercial Park, Oranmore Co. Galway Ireland +353 91 792444 Fax +353 91 792445